

INDUSTRY SQUELETTE



M&T | Lever Handle

Designer: Roman Ulich







Material Stainless Steel

Dimension for Application For standard door thicknesses from 38.5 - 45mm.

6 Finishes Stainless Steel - grinded NRz 
Matt Black K-Industrial 

Hole Drilling: Ø 24 - 35mm

Titanium / PVD Finishes PVD Satin Black TiN-K 
PVD Gunmetal TiN-C 
PVD Bronze TiN-B 
PVD Brushed Brass TiN-A 

Mounting Bolt-through fixing

Warranty Mechanics: 3 years
NRz: 3 years
Matt Black: 5 years
Titanium: 15 years

MAGNETIC

A choice of **6 finishes** & colours, with a **8-15 year warranty** depending on the type of surface, with quality M 2018 mechanics, for use on interior and exterior doors.


MANUFACTORY MECHANICS M 2018




Mechanics of the magnetic rose

Designed, manufactured and assembled in M&T – with its own patent of the rosette using neodymium magnets and a system of returned springs.

ROUND ROSE

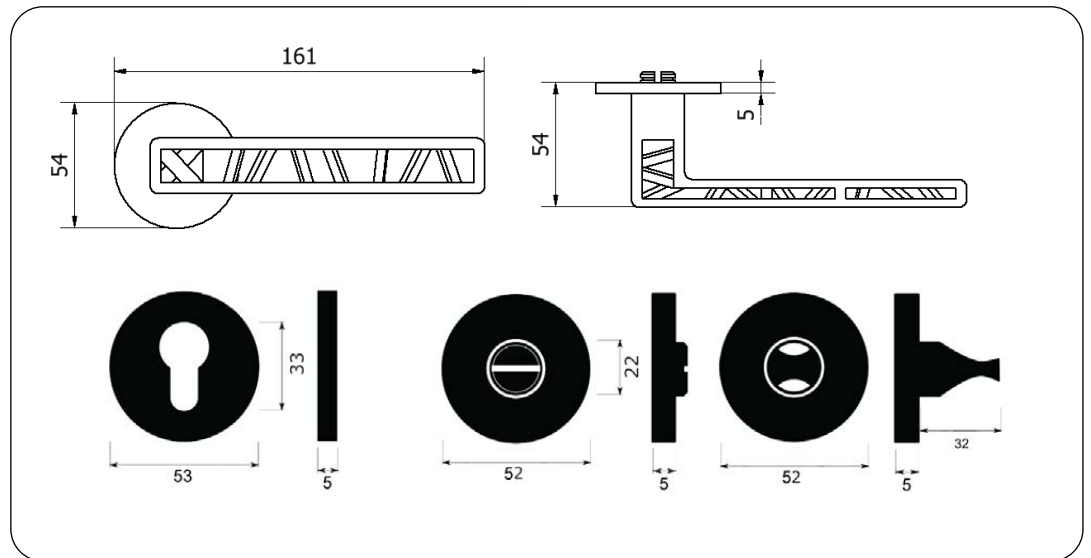

SQUARE ROSE

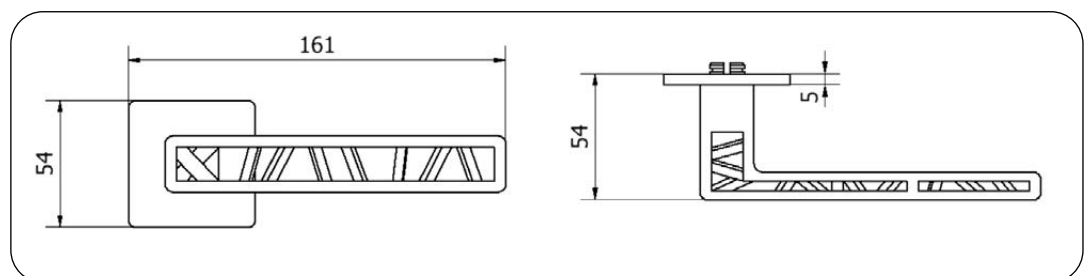

Two Tease offers a range of lock options for handles.
Click on the boxes to see more information.

AGB LOCKS




[Click Here](#)

TUBULAR LATCH & PRIVACY BOLTS



[Click Here](#)

TITANIUM FINISH

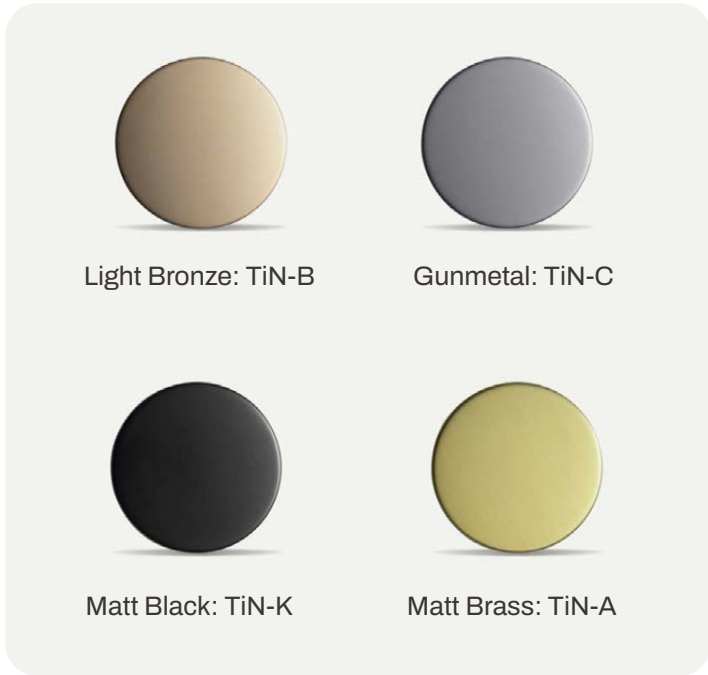

The surface of the door handles and labels M&T is coated with a hard, chemically stable film using methods PVD and PACVD. This technological process is done under lower pressure in vacuum chambers. In the PACVD (Plasma Assisted Chemical Vapour Deposition) process, the coating grows due to heterogeneous chemical reaction on the surface of the substrate.

The reaction substances are supplied in the gas phase. These gases are activated in low temperatures plasma where molecules are dissociated and radicals, ions and excited atoms arise. It decreases the activations energy necessary for the chemical reaction so the reaction temperature can be lower. Moreover, the properties of the growing layer can be controlled by the variation of the plasma parameters. In the PVD (Physical Vapour Deposition) process, the coating grows due to deposition of atoms coming from a solid-state target place in the vacuum recipient walls.

ADVANTAGES

A thin layer of 2 microns has several advantages, which makes it so exceptional:

- The extraordinary hardness** 7 times harder than handles with a protective baked enamel
- High resistance to abrasion and scratching** Cannot be damaged/ scratched with normal use
- Colours and chemical stability** The surface even after many years has the same colour
- Corrosion** Quality applied coatings are only slightly microporous, which prevents the penetration of small particles to material of handle and thus the formation of corrosion.

