


































SOGUT

M&T | Lever Handle



Finish Shown: Antique Brass (Ms-A)

Material	Handle: Solid Brass Rosette: Magnetic Stainless Steel	Dimension for Application	Recommended door thickness: 38.5 - 44mm. Options for door thickness 38-126mm is available.														
10 Finishes	<table border="0"> <tr> <td>Satin Nickel - Grinded</td> <td>SNi</td> <td></td> </tr> <tr> <td>Glossy Chrome</td> <td>Cr</td> <td></td> </tr> <tr> <td>Black Chrome</td> <td>Cr-K</td> <td></td> </tr> </table>	Satin Nickel - Grinded	SNi		Glossy Chrome	Cr		Black Chrome	Cr-K		Magnetic Rosette	Door preparation: Drilling a Ø 24-25mm hole.					
Satin Nickel - Grinded	SNi																
Glossy Chrome	Cr																
Black Chrome	Cr-K																
Titanium / PVD Finishes	<table border="0"> <tr> <td>Black</td> <td>TiN-K</td> <td></td> </tr> <tr> <td>Brushed Brass</td> <td>TiN-A</td> <td></td> </tr> <tr> <td>Gunmetal</td> <td>TiN-C</td> <td></td> </tr> <tr> <td>Light Bronze</td> <td>TiN-B</td> <td></td> </tr> <tr> <td>Matt Brown</td> <td>TiN-S</td> <td></td> </tr> </table>	Black	TiN-K		Brushed Brass	TiN-A		Gunmetal	TiN-C		Light Bronze	TiN-B		Matt Brown	TiN-S		Handles with magnetic rosettes can be fully inserted into the door, be careful of the weakened side of the rebated and reversed doors. Thickness of the rosettes is 5 mm.
Black	TiN-K																
Brushed Brass	TiN-A																
Gunmetal	TiN-C																
Light Bronze	TiN-B																
Matt Brown	TiN-S																
Brass Finishes	<table border="0"> <tr> <td>Natural Brass</td> <td>Ms</td> <td></td> </tr> <tr> <td>Polished Brass</td> <td>Ms-L</td> <td></td> </tr> <tr> <td>Antique Brass</td> <td>Ms-A</td> <td></td> </tr> </table>	Natural Brass	Ms		Polished Brass	Ms-L		Antique Brass	Ms-A			The space/depth of insertion for the magnetic rosette including the returned spring and handle neck is 8.5 mm.					
Natural Brass	Ms																
Polished Brass	Ms-L																
Antique Brass	Ms-A																
Warranty	<table border="0"> <tr> <td>Mechanics: 3 years</td> </tr> <tr> <td>SNi, Cr: 3 years</td> </tr> <tr> <td>Titanium: 15 years</td> </tr> <tr> <td>Brass: Lifetime</td> </tr> </table>	Mechanics: 3 years	SNi, Cr: 3 years	Titanium: 15 years	Brass: Lifetime	Mounting	Bolt-Through Fixing										
Mechanics: 3 years																	
SNi, Cr: 3 years																	
Titanium: 15 years																	
Brass: Lifetime																	

NON-MAGNETIC

Available in a choice of **11 finishes** with a guarantee of 3-15 years depending on the finish. Suitable for interior and exterior doors. Round & square non-magnetic rose comes in depths of 7mm.

MAGNETIC

Available in a choice of **10 finishes** with a guarantee of 8-15 years depending on the finish. Suitable for interior and exterior doors. Round & square magnetic rose comes in depths of 5mm.


MANUFACTORY MECHANICS M 2000

(Round Rose)



Mechanics of the non-magnetic rose

Mechanics M 2000 - designed, manufactured and assembled at M&T - with own patented slip system which prevents bending and cacking the door in lock area. Simple and fast assembly




MANUFACTORY MECHANICS M 2018

(Round & Square Rose)



Mechanics of the magnetic rose

Designed, manufactured and assembled in M&T - with its own patent of the rosette using neodymium magnets and a system of returned springs.




MANUFACTORY MECHANICS M 2004

(Square Rose)




Mechanics of the non-magnetic rose


Mechanics M 2004 - designed, manufactured, and assembled at M&T - with own patented slip system which prevents bending and cacking in the door in lock area. Simple and fast assembly





ROUND ROSE
Glossy Chrome (cr)

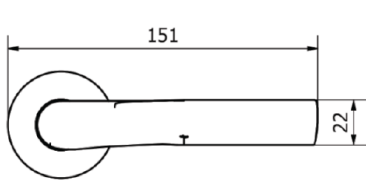




Non-Magnetic





Magnetic

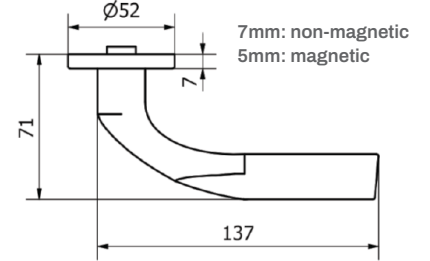


Magnetic

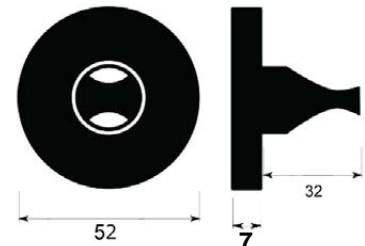


Non-Magnetic

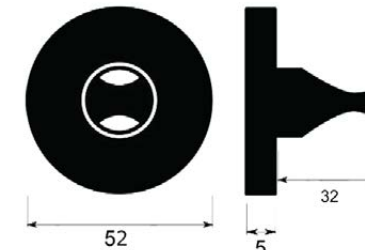


SQUARE ROSE
Matt Nickel (SNi)

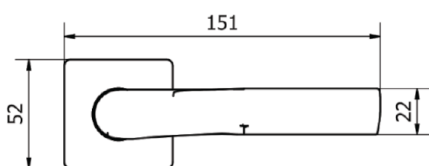

Non-Magnetic

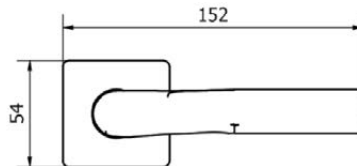

Magnetic

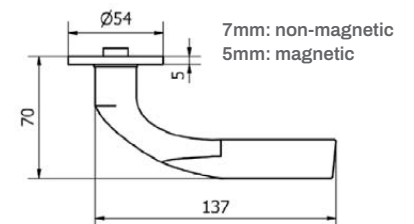

Two Tease offers a range of lock options for handles.
Click on the boxes to see more information.

AGB LOCKS




[Click Here](#)

TUBULAR LATCH & PRIVACY BOLTS



[Click Here](#)

TITANIUM FINISH

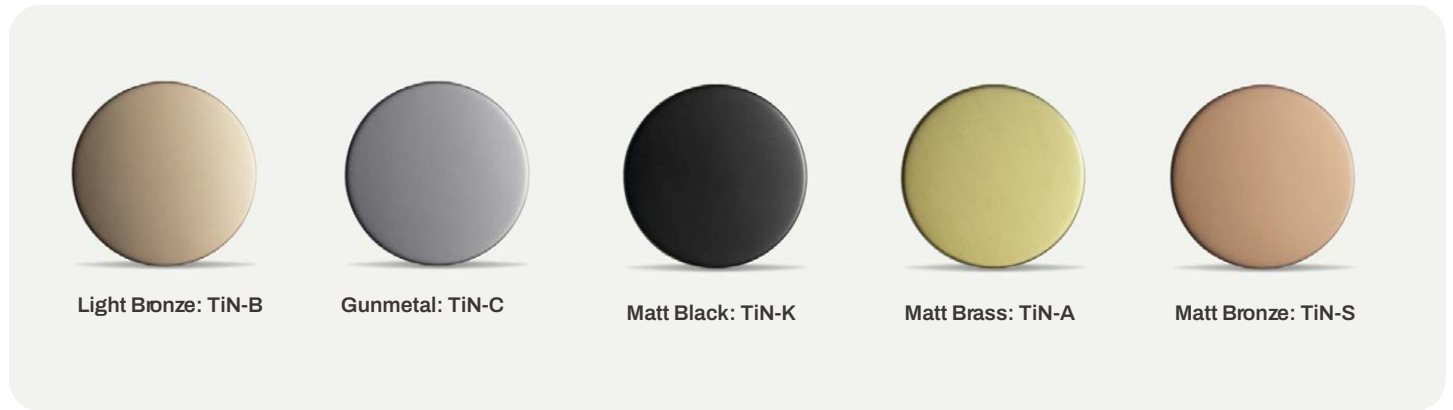

The surface of the doorhandles and labels M&T is coated with a hard, chemically stable film using methods PVD and PACVD. This technological process is done under lower pressure in vacuum chambers. In the PACVD (Plasma Assisted Chemical Vapour Deposition) process, the coating grows due to heterogeneous chemical reaction on the surface of the substrate.

necessary for the chemical reaction so the reaction temperature can be lower. Moreover, the properties of the growing layer can be controlled by the variation of the plasma parameters. In the PVD (Physical Vapour Deposition) process, the coating grows due to deposition of atoms coming from a solid-state target placed in the vacuum recipient walls.

The reaction substances are supplied in the gas phase. These gases are activated in low temperatures plasma where molecules are dissociated and radicals, ions and excited atoms arise. It decreases the activation energy

ADVANTAGES

A thin layer of 2 microns has several advantages, which makes it so exceptional:

- The extraordinary hardness** 7 times harder than handles with a protective baked enamel
- High resistance to abrasion and scratching** Cannot be damaged/ scratched with normal use
- Colours and chemical stability** The surface even after many years has the same colour
- Corrosion** Quality applied coatings are only slightly microporous, which prevents the penetration of small particles to material of handle and thus the formation of corrosion.

BRASS FINISHES

- Internal and external use
- Anti-microbial
- Maintenance Free - cotton or micro fibre use
- Lead time: 10 weeks
- Lifetime guarantee for brass
- Living finishes




Natural Brass (MS)

Mechanically treated surface on a brass product with a soft texture and colours. The surface ages naturally and the colour changes in according to the weather conditions and climatic conditions.



Polished Brass (Ms-L)

Mechanically polished brass surface with a high gloss finish which will gradually patina. Surface gets naturally old and changes colour and appearance according to frequency of use on a brass product with the effect of several years use providing an aged finish. The brass has a combination of lighter and darker shades, and the surface will naturally age and change its colour according to the climatic conditions.



Antique Brass (Ms-A)

Mechanically modified surface on a brass product with the effect of several years use providing an aged finish. The brass has a combination of lighter and darker shades, and the surface will naturally age and change its colour according to the climatic conditions.

OTHER FINISHES



Cr: Glossy Chrome



SNi: Matt Nickel



Cr-K: Chrome Black