

BASICS LEVER (LB4)

FORMANI



Shown Above: LB4-16 - Satin Stainless Steel (IN)

Lever Handle
evel Hallule

Code

LB4-19 Ø 19mm lever, 136mm long sprung on a rose

1501D146INXX0



LBWC50

Round turn and release privacy set including

5/6/7/8mm pin with

indication.

1501T020INXXU

LBWC50-ZI

Round turn and release privacy set including 5/6/7/8mm pin without indication.

1501T020INXXUZI

Escutcheons

Key Escutcheons LBY50

1501Y002INXX0

>> More finishes available on the next page.

LB₁₀

Doorstop 1501Z028INXX0




LB4-19

LB4-19 LBWC50 LBY50 **LB10 Available Finishes Door Handle Privacy Key Escutcheon Doorstop** ZI = Without Indicator Satin l in Stainless Steel 1501D146INXX0 1501T020INXXU 1501Y002INXX0 1501Z028INXX0 1501T020INXXU**ZI IMAGE** Satin Black | NM UNAVAILABLE 1501D146NMXX0 1501T020NMXXU 1501Y002NMXX0 1501Z028NMXX0

1501T020NMXXU**ZI**

CLASSIFICATION

According to EN 1906: 2012



Code can be broken down into the following grade/ digits:

1. CATEGORY OF USE [3]

High frequency of use by public or others with little incentive to exercise care and with a high chance of misuse, e.g. public office doors. *Hollow handle*.

2. DURABILITY [7]

200,000 cycles

3. TEST DOOR MASS [-]

No Classification

4. FIRE RESISTANCE [B]

Suitable for use on fire/smoke door assemblies (tested with 200,000 test cycles)

5. SAFETY [0]

Normal use

6. CORROSION RESISTANCE [3]

High Resistance – 96 hours of salt spray test

7. SECURITY [0]


Not suitable for burglary resistant doors


8. TYPE OF OPERATION [B]


Spring Loaded levers


View more info on FORMANI classifications



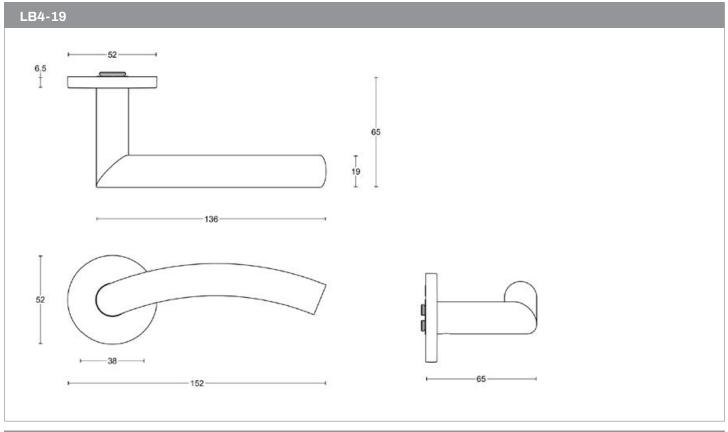

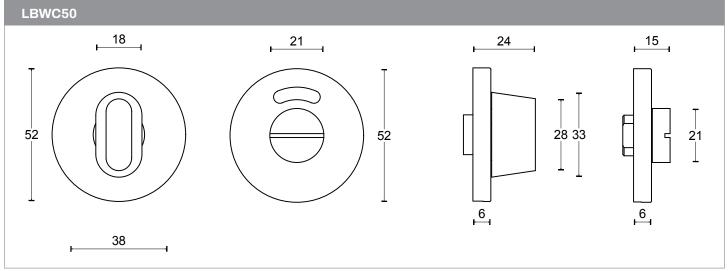

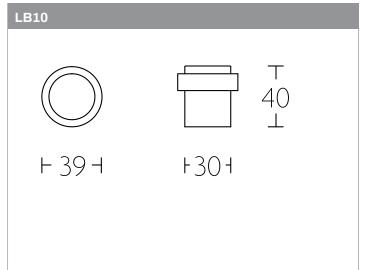

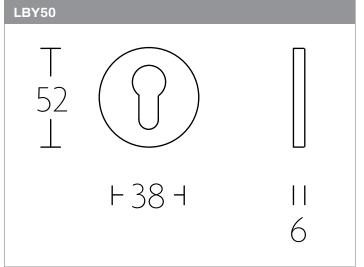



Two Tease offers a range of lock options for handles. Click on the boxes to see more information.

AGB LOCKS



Click Here

TUBULAR LATCH & PRIVACY BOLTS



Click Here